

# TRU-GARD

## DOOR FRAME BOLLARD

### ENQUIRY FORM

Download form to PC before editing


#### Site Details

Company Name:	Date:
Delivery Address:	
Customer Reference/Order Number:	
Contact Name:	Phone:
Site Photos Provided: Yes <input type="checkbox"/> No <input type="checkbox"/>	Completed By:

#### Door Frame Bollard Requirement (See TRU-GARD Safety Bollard Data Sheet for full specification details)

1) **On the drawing below, enter the height and width of the required bollard.**

(NB: The bollard will be built to the size indicated. Tru-Bilt recommends the bollard width to be 100mm less than the door/track width, and the bollard height to be 50mm less than the door/lintel height. Flanges protrude 40mm from the door frame).

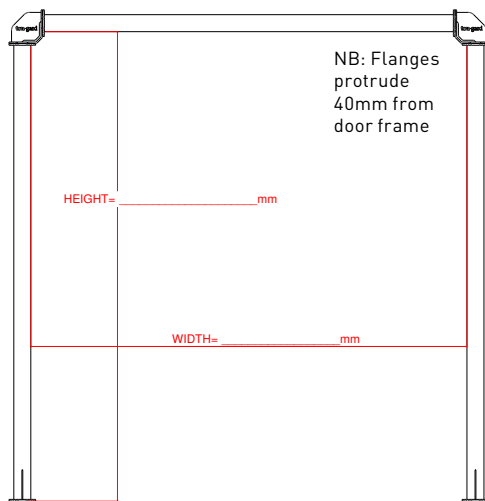

Solid bottom fixing required at floor level

**Diameter:**

☐ 115mm☐ 165mm

**Finish:**

☐ Yellow☐ Galvanised☐ Yellow over galvanised

Quantity required of this size and specification:

#### Proposal Acceptance

If you wish to proceed with this proposal/order and agree with TRU-BILT Industries Ltd terms of trade, please complete your order number and sign this enquiry form, then scan and return to TRU-BILT with your signed proposal. Thank you.

**Proposal Number:**

**Order Number:**

**Name:**

**Date:**

**Signature:**

Return this form to us to; ☐ Place your order, or ☐ Request a price

Phone: +64 3 488 2060 Email: [info@tru-bilt.co.nz](mailto:info@tru-bilt.co.nz) Website: [www.tru-bilt.co.nz](http://www.tru-bilt.co.nz)