

TRU-GLIDE

INSULATED BLAST FREEZER DOOR

ENQUIRY FORM

Download form to PC before editing


Site Details

Company Name:	Date:
Delivery Address:	
Customer Reference/Order Number:	
Contact Name:	Phone:
Site Photos Provided: Yes <input type="checkbox"/> No <input type="checkbox"/>	Completed By:

Door Requirement (See TRU-GLIDE Data Sheet for full specification details)

- 1) **On the drawing below, enter the door opening measurements (height and width), as well as the headroom, sideroom and backspace measurements.**

[NB: Recommended maximum door size: 5980mmH x 7100mmW. Minimum headroom = DOH x 0.22 + 400mm. Minimum sideroom on each side = 300mm. Minimum backspace = DOH x 1.22 + 550mm].

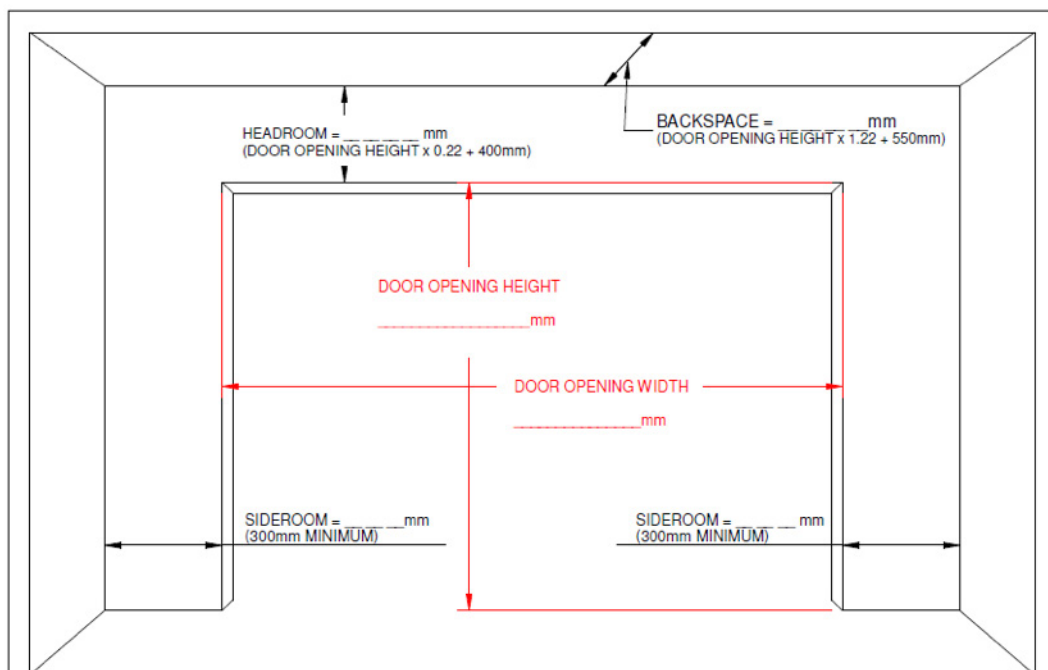

NB: The door surround and floor to have heat trace installed at client's own arrangements

- 2) **Quantity** of doors required at this size and specification:

Continued over page...

