

# TRU-SPRINT

## COLDFLEX RAPID ROLL DOOR

### ENQUIRY FORM

Download form to PC before editing

DMF code: Coldsaver


### Site Details

|  |               |
|--|---------------|
| Company Name:  | Date:         |
| Delivery Address:  |               |
| Customer Reference/Order Number:   |               |
| Contact Name:  | Phone:        |
| Site Photos Provided: Yes <input type="checkbox"/> No <input type="checkbox"/> | Completed By: |

### Door Requirement (See TRU-SPRINT COLDFLEX Data Sheet for full specification details)

- On the drawing below, enter the door opening measurements (height and width), as well as the headroom and sideroom measurements. Enter the backspace depth if applicable.**

(NB: Recommended maximum door size: 5000mmH x 5000mmW. Minimum headroom 650mm. Minimum sideroom on motor side 420mm, on non-motor side 160mm)

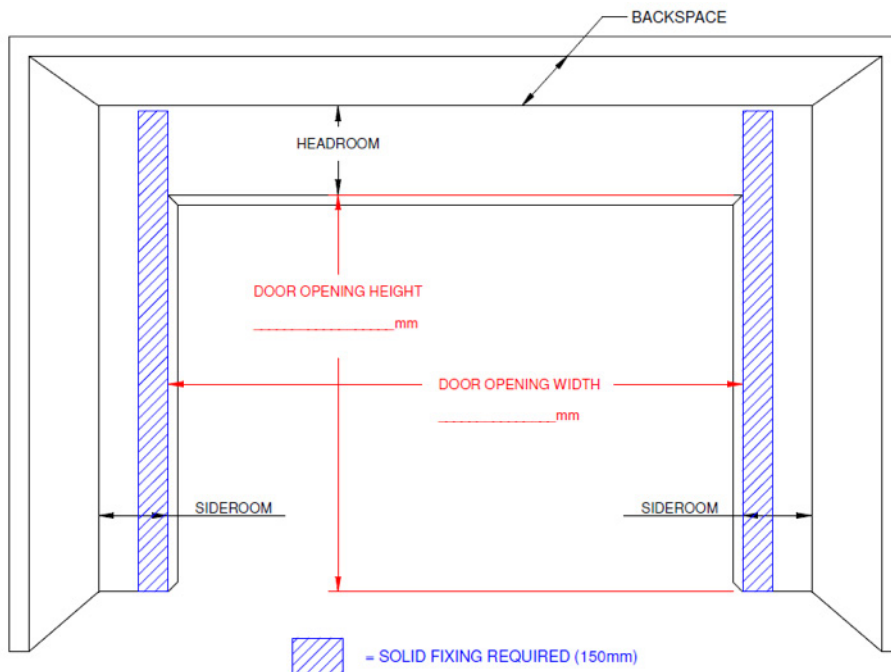

- Quantity** of doors required at this size and specification:

Continued over page...

