

TRU-SPRINT

COLDFLEX RAPID ROLL DOOR SERIES II

ENQUIRY FORM

Download form to PC before editing


Site Details

Company Name:		Date:
Delivery Address:		
Customer Reference/Order Number:		
Contact Name:	Phone:	
Site Photos Provided: Yes <input type="checkbox"/> No <input type="checkbox"/>	Completed By:	

Door Requirement (See TRU-SPRINT COLDFLEX Data Sheet for full specification details)

- On the drawing below, enter the door opening measurements (height and width), as well as the headroom and sideroom measurements. Enter the backspace depth if applicable.**

(NB: Recommended maximum door size: 5000mmH x 5000mmW. Minimum headroom 1000mm. Minimum sideroom on motor side 400mm, on non-motor side 200mm)

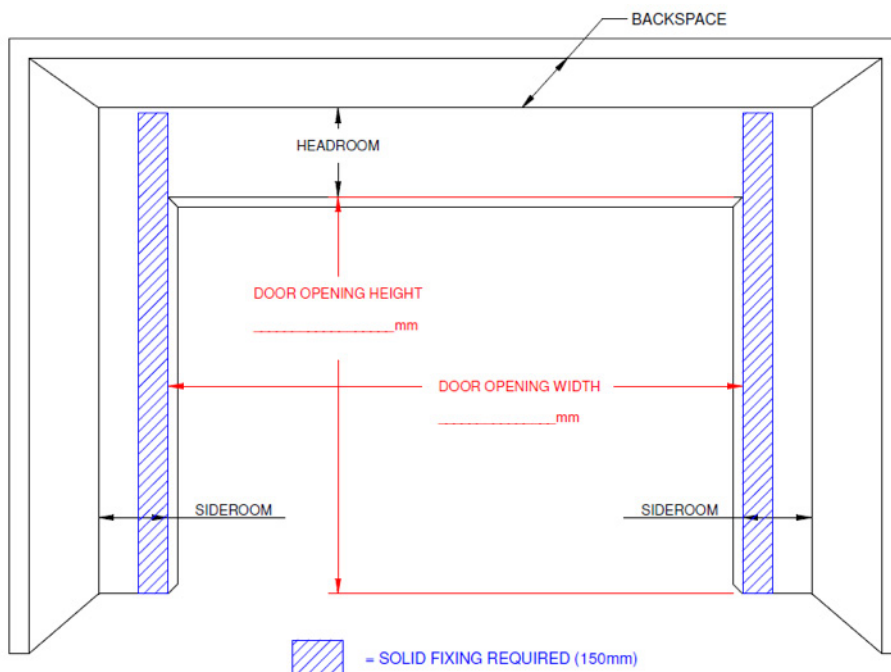

- Quantity** of doors required at this size and specification:

Continued over page...

